


+

TRUGRID
PRODUCT DATA SHEET
WWW.SEKTORINTERIORS.COM


**TRUGRID
HOOK &
CLICK**




PERIMETER ANGLE TRIM




TRUGRID HOOK 24MM
Main Runner Cross Tees

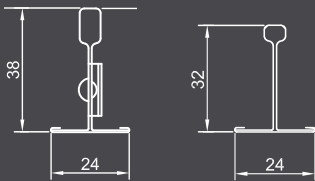


TRUGRID CLICK 15MM
Main Runner Cross Tees

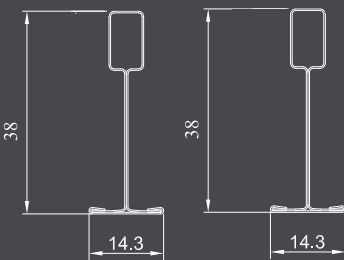

TRUGRID CLICK 24MM
Main Runner Cross Tee 0.6M

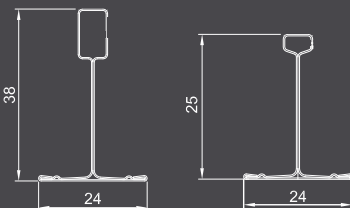

CROSS TEE 1.2M



PRODUCT DATA SHEET

HIGH QUALITY, STRONG AND ROBUST, FULLY FIRE-TESTED GRID SYSTEMS.

GENERAL DATA

Connection

All Main tees bayonet connection;
Click cross tees, Stab joggle connection
Hook cross tees, Hook cut back connection

UDL

Hook 24mm Main Runner
Short Cross Tee and Long Cross Tee 10kgs/m² based on ladder installation

Click 24mm Main Runner
Short Cross Tee and Long Cross Tee 12kgs/m² based on ladder installation

Click 15mm Main Runner
Short Cross Tee and Long Cross Tee 10kgs/m² based on ladder installation

Durability

Class B

FIRE PERFORMANCE

Reaction to Fire

A1 EN13501-1

Fire Resistance

See individual Sektor tile data sheets

HANDLING & STORAGE

Do not throw, drop or place cartons on edges or corners. When storing cartons place on a clean, flat surface within a dry, controlled environment. To prevent deformation, cartons of main tee profiles should be carried or moved by two people

INSTALLATION

Sektor ceiling systems should be installed in accordance with manufacturer's recommendations and relevant test reports

EUROPEAN HARMONISED STANDARD

EN13964



PERIMETER ANGLE TRIM

Description	Thickness (mm)	Length (mm)	Height (mm)
Sektor TruGrid TG perimeter angle trim 3.0M	0.5	3000	32

TRUGRID HOOK 24MM

Description	Thickness (mm)	Length (mm)	Height (mm)
Sektor TruGrid TGH 24 Hook 24mm main runner 3.7M	0.4	3700	38
Sektor TruGrid TGH24 Hook 24mm cross tee 0.6M	0.4	600	32
Sektor TruGrid TGH24 Hook 24mm cross tee 1.2M	0.4	1200	32

TRUGRID CLICK 15MM

Description	Thickness (mm)	Length (mm)	Height (mm)
Sektor TruGrid TGC15 click 15mm main runner 3.0M	0.4	3000	38
Sektor TruGrid TGC 15mm cross tee 0.6M	0.4	600	38
Sektor TruGrid TGC15 Click 15mm cross tee 1.2M	0.4	1200	38

TRUGRID CLICK 24MM

Description	Thickness (mm)	Length (mm)	Height (mm)
Sektor TruGrid TGC Click 24mm main runner 3.6M	0.4	3600	38
Sektor TruGrid TGC24 Click 24mm cross tee 0.6M	0.4	600	25
Sektor TruGrid TGC24 Click 24mm cross tee 1.2M	0.4	1200	38